

Design Loads

wing lift	150 lb @ 57 m/s
root bend.mom.	1400 lb-in
root cap load	2400 lb
root cap area	0.021 in ² top 0.014 in ² bot
cap stress	100 ksi top 150 ksi bot 390 ksi max
rod stress	120 ksi
web stress	270 psi (shear)
rib stress	750 psi (axial)
root torsion	33 lb-in
root skin th.	0.063 in
wing skin shear	100 psi

Wing spar weights

caps	38 g (prepreg uni CF)
core	36 g (10,8,6 lb endgrain balsa)
wrap	4 g (3k Kevlar tow/epoxy)
join	20 g (11/32" CF rod)
tubes	12 g (3/8" OD brass)
boxes	12 g (ply, glass cloth)
glue	8 g

Wing panel weights

center	144 g
mids	101 g
tips	24 g

Fuselage weights



shell	45 g
fittings	18 g
bulkheads	4 g
towhook	3 g
pushrods	7 g

Kevlar fuselage shell

boom	0.58" -> 0.38" ID 0.022" wall (3 plies uni CF)
All-moving tail	45 sq in 8.6% Vh = 0.39 -17 ... +10 deg strong expo -6 deg mix-in with full spoiler

Allegro-E Lite
2-meter electric & winch sailplane
Mark Drela 10 Sep 00

mass	= 23 oz
m/A	= 6.4 oz/ft ²
area	= 525 sq in
span	= 78.4 in
A.R.	= 11.7
CL	= 0.9 max = 0.7 min sink = 0.5 max L/D = 0.3 best climb rate = 0.1 min
min sink	= 0.95 ft/s
max L/D	= 19.0

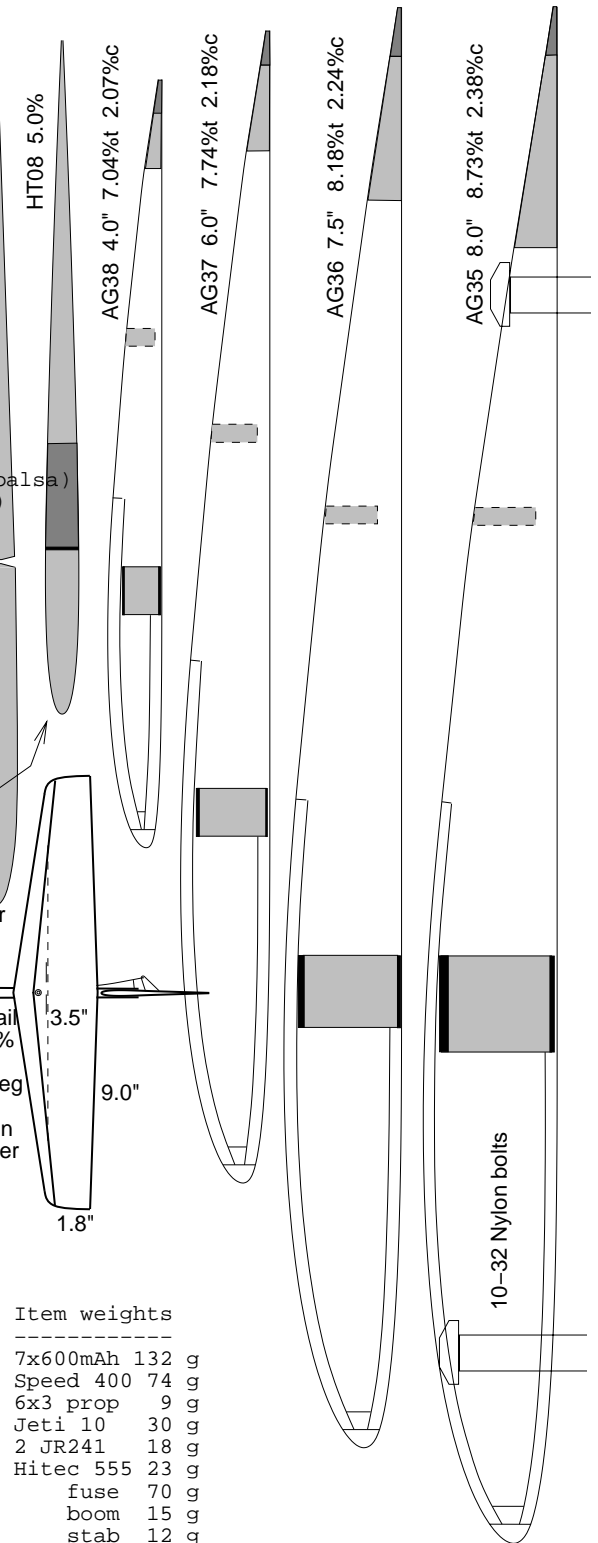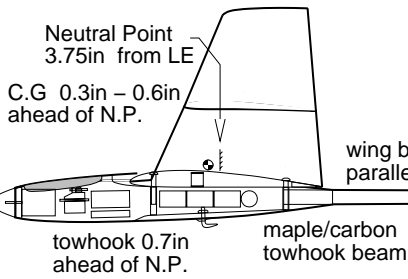

Item weights

7x600mAh	132 g
Speed 400	74 g
6x3 prop	9 g
Jeti 10	30 g
2 JR241	18 g
Hitec 555	23 g
fuse	70 g
boom	15 g
stab	12 g
rudd	10 g
wing	269 g
TOTAL	662 g

